

Dixboro Rd at Pontiac Trail Roundabout

Construction Information Meeting
May 14, 2026



Agenda

- I. Meeting information
- II. Presentation
- III. Q and A

Today's Presenter



Becky Houle
Project Manager –
Traffic & Safety



Dixboro Rd at Pontiac Trail Roundabout

Roundabout Planned for 2026



Current Condition

- All-way stop (4-way stop) controlled intersection, with flashing beacon (overhead)



Planning – Why this intersection?


- WCRC applied for and was awarded a Federal Carbon Reduction Grant for a roundabout
- Traffic volume & congestion



Project Funding and Cost

- Federal Carbon Reduction Program
- Michigan Transportation Funds (MTF)
 - Fees and taxes collected from license registrations and gas sales.

Construction cost estimate \$1.5 million

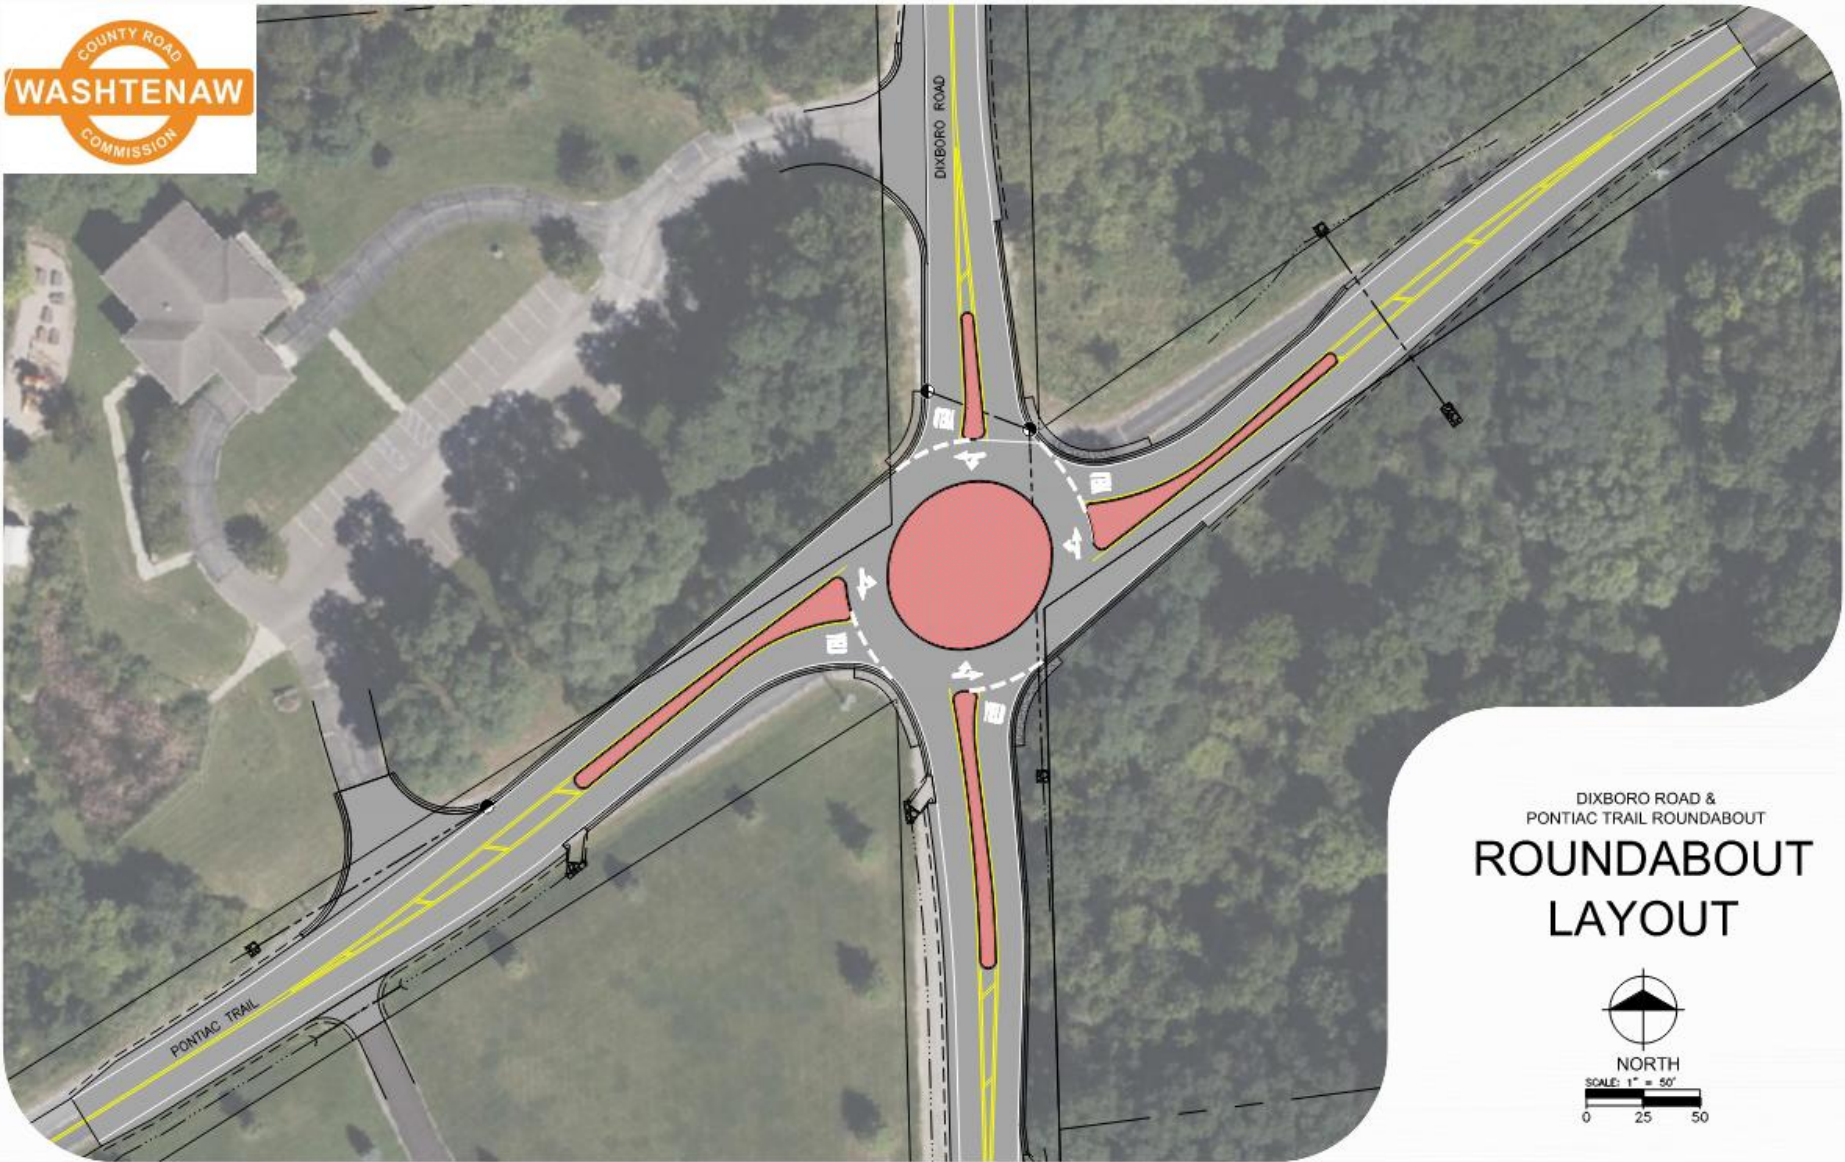

DIXBORO ROAD &
PONTIAC TRAIL ROUNDABOUT
**ROUNDABOUT
LAYOUT**



Roundabout


- Entering traffic yields
- Counterclockwise movement
- Islands control speed



N. Territorial at Pontiac Trail Roundabout

Tentative Schedule

- MDOT Bid Letting
 - June 5, 2026
- Road closure
 - End of July 2026
- Open to Traffic
 - End of October 2026
 - Weather dependent

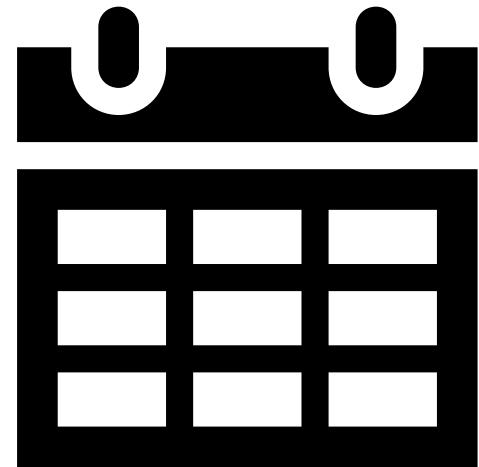

Remove Pavement



Build New Roadbed



Prepare for Curb



Install Curb and Splitter Islands



Install Central Island



Pave



Pavement Markings



Signs



Traffic Impact - Road Closure

Road closure sign
means the ROAD IS CLOSED



Detour



N. Territorial Rd

Sutton Rd

Pontiac Tr

Dixboro Rd

Joy Rd

Edith's Market

German Park Recreation Club

Down Under Stables

Pontiac Trail

Pontiac Trail

Pontiac Trail

Dixboro Rd

Find Out More

- **Visit project page @ wcroads.org**
 - Subscribe to receive project update emails
- **Contact Project Manager**
 - Becky Houle, (734) 327-6678,
houleb@wcroads.org

Dixboro Road at Pontiac Trail Roundabout

