

Werkner Rd Project

WCRC Board Working Session Meeting
January 20, 2026



Resurfacing Planned for 2026



Project Background

- Project selection
 - Asset Management
- Funding
 - Roads & Non-motorized Millage
 - Originally scheduled for 2025
- Washtenaw County BOC MOU



Werkner Rd



Speed limit

Prima Facie 55 mph



Traffic Volume

Approx. 750 vehicles
per day




Crash History

Current Road Condition – Werkner Rd



Werkner Rd - Preliminary Engineering

- Design consultant hired
- Roadway Design Standards
 - Shoulders width
- Context sensitive design
- Drainage

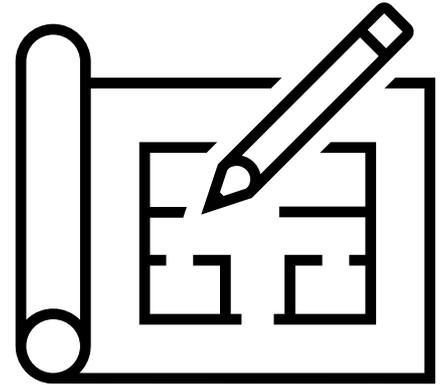

Werkner Rd – Proposed Plan

- **Section 1: Sibley Rd to 1200 Feet North**

- Mill & resurface the asphalt pavement
- Slightly widen the asphalt from 22' to 24'
 - accommodates the edge line
 - maintaining current 11' lane widths
- No drainage improvements, thereby greatly limiting tree removals.



Werkner Rd – Proposed Plan

Section 2: 1200 Feet North to M-52

- Pulverize, shape, & compact the existing pavement.
- Use the modified material as a base for new asphalt pavement.
- Maintain current 11' lane widths with 2' paved + 2' gravel shoulder widths.
- Some tree removals are required; impacts are currently being assessed.



Werkner Rd – Proposed Plan

- Google Streetview



Werkner Rd Project Information Meeting

- Two public meetings
- Virtual Meeting
 - February 9 at 11am
 - Zoom
- In-person Meeting
 - February 11 at 6pm
 - 311 S Main St., Chelsea MI

Save the Date



PUBLIC INFORMATION MEETINGS
Werkner Road Project

Virtual Meeting	In-person Meeting
Monday, February 9, 2026	Wednesday, February 11, 2026
11:00 am	6:00 P.M.
Zoom Link https://bit.ly/wcrcprojectmeeting	City of Chelsea Council Chambers 311 S. Main Street Chelsea, MI 48118
By phone: (929) 205-6099 Meeting ID: 879 2332 8754	

**Sign up for
Project Updates**

For more information:
wcroads.org or call (734) 761-1500

